



3FM14 (6V14.0Ah)




3FM14 is a general purpose battery with 3~ 5 years in standby service or more than 260 cycles at 100% D.O.D in cycle service. As with all QiangJun batteries, all FM models are rechargeable, highly efficient, leak proof and maintenance free.

Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	14.0Ah@ 20hr-rate to 1.75V per cell @ 25°C
Weight	Approx. 2.37 Kg
Max. Discharge Current	140 A (5 sec)
Internal Resistance	Approx. 10 m
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	6.8 to 6.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	4.2 A
Equalization and Cycle Service	7.25 to 7.45 VDC/unit Average at 25°C
Self Discharge	QiangJun batteries can be stored for more than 6 months at 25°C. Please charge batteries before using. For higher temperature, the time interval will be shorter.
Terminal	Terminal T8
Constainer Material	A. B. S. (UL94-HB) Flam mability resistance of UL94-V2 can be available upon request.



Dimensions

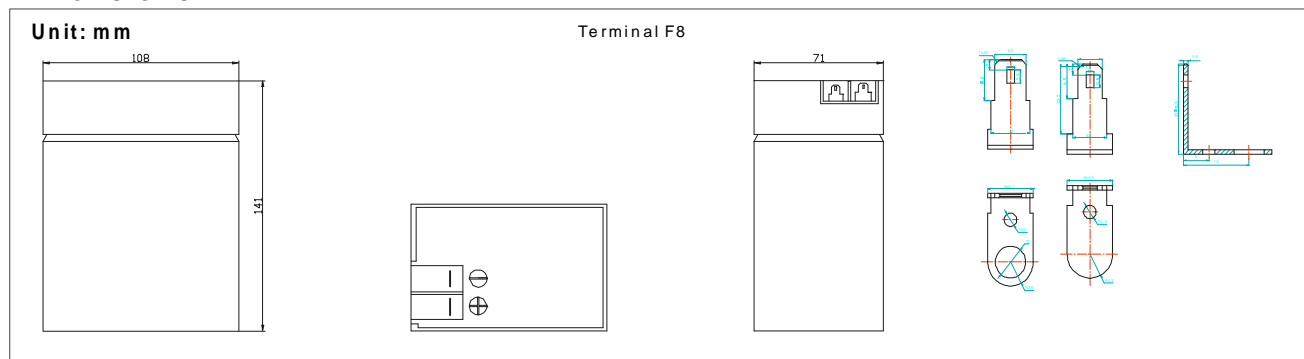

Constant Current Discharge Characteristics Unit: A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	58.1	38.9	29.9	16.4	9.7	5.82	3.58	2.94	2.37	1.74	1.37	0.77
1.67V	54.4	36.2	28.1	16.2	9.7	5.78	3.57	2.93	2.35	1.74	1.36	0.74
1.70V	51.5	35.1	27.4	16.0	9.6	5.77	3.56	2.91	2.34	1.74	1.34	0.73
1.75V	46.5	32.9	26.0	15.7	9.45	5.70	3.54	2.90	2.32	1.74	1.33	0.70
1.80V	41.5	30.6	24.6	15.3	9.31	5.60	3.51	2.88	2.31	1.72	1.30	0.67
1.85V	36.6	28.4	23.1	14.9	9.18	5.52	3.49	2.87	2.30	1.72	1.29	0.66


Constant Power Discharge Characteristics Unit: W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	112	72.8	59.2	32.8	19.4	11.6	7.15	5.85	5.56	3.49	2.73	1.53
1.67V	105	70.0	56.1	32.3	19.4	11.6	7.14	5.84	5.52	3.49	2.70	1.47
1.70V	103	67.9	54.8	32.1	19.3	11.5	7.13	5.84	5.50	3.46	2.67	1.44
1.75V	93.0	65.1	52.0	31.3	19.0	11.4	7.08	5.80	5.49	3.44	2.65	1.39
1.80V	83.1	60.9	49.1	30.6	18.7	11.2	7.03	5.75	5.47	3.43	2.60	1.34
1.85V	73.2	56.7	46.3	29.8	18.4	11.0	6.97	5.71	5.46	3.43	2.56	1.30


All mentioned values are average values.



Temperature effects curve

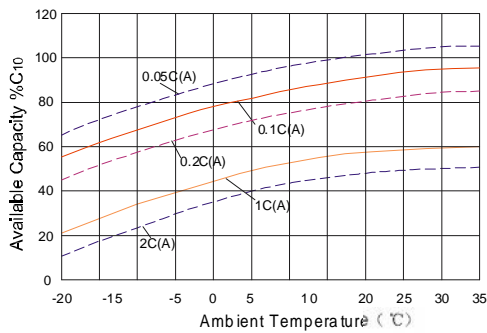

Storage characteristic

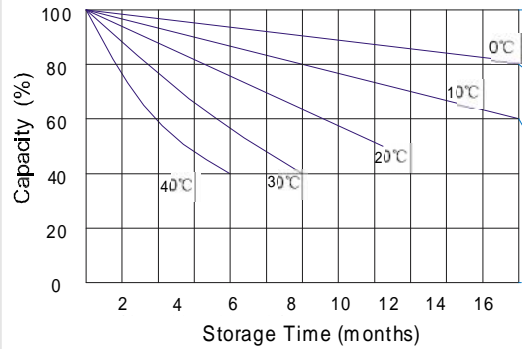


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing until this state is reached

Supplementary charge and storage guidelines


Life characteristics of cyclic use

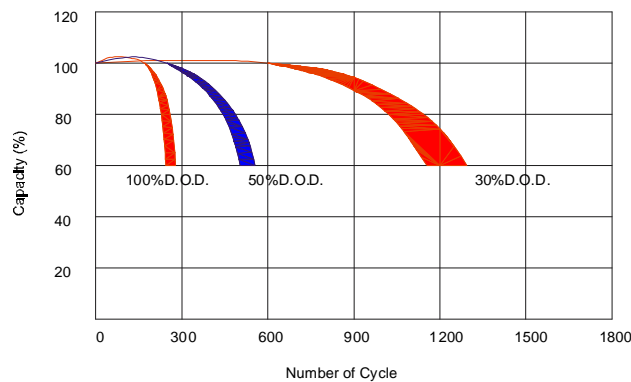


Effect of Temperature on long term float life

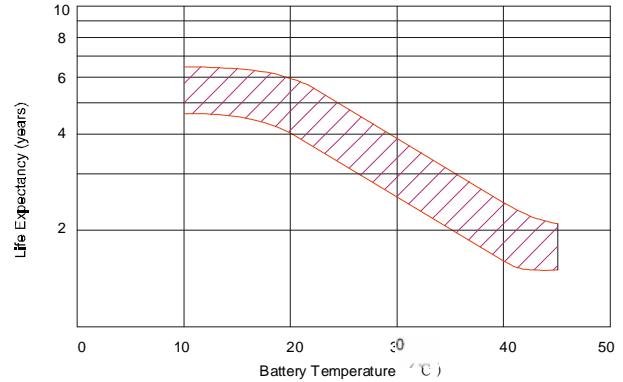

Charge characteristic curve for standby use

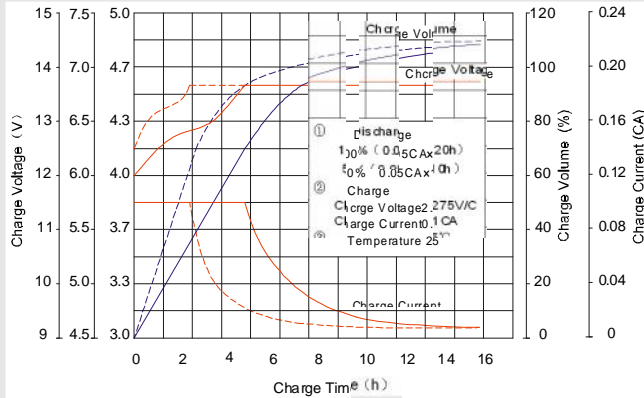

Discharge characteristic curve

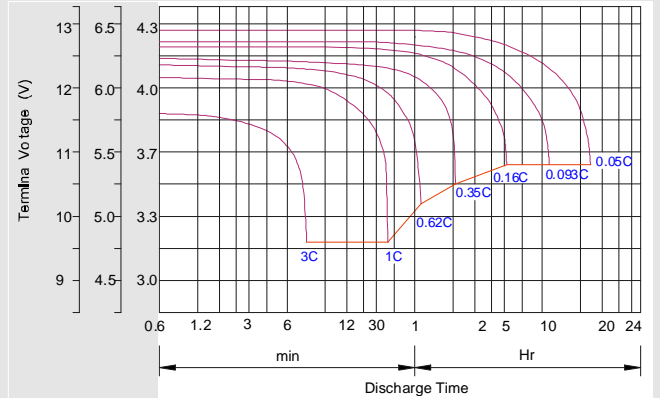

Charging Procedures

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	14.7	14.4-15.0	0.3C
Standby	25°C	13.7	13.6-13.8	0.3C

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	$A < 0.2C$	$0.2C < A < 1.0C$	$A \geq 1.0C$

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	7.25-7.45V, 5-11h, Max. Current 0.1CA
Constant Current	0.1CAx5h
Fast	0.3CAx1.7h

Charging Procedures(6V series)

Application	Charge Voltage (V)			Max. Charge Current
	Temperature	Set point	Allowable range	
Cycle Use	25°C	7.35	7.25-7.45	0.3C
Standby	25°C	6.85	6.8-6.9	0.3C

QIANGJING BATTERY CO.,LTD
 Mudan Road Xiacheng Town,
 Yuefang District,
 Xiangtan City, Hunan P.R.China